

AluLock is a variable length cable seal that provides a high level of security through its unique locking mechanism and cable design. Cable sizes with diameter 3.5mm, 4.0mm and 5.0mm have successfully passed the stringent ISO 17712:2010 test to qualify as HIGH security and C-TPAT compliant seals.

APPLICATIONS

- Shipping containers
- Rail trucks
- Plastic distribution boxes
- Petrochemical valves

FEATURES

- Non-preformed cable unravels when cut
- Galvanized steel cable, removable only with tool
- ISO17712:2010 & C-TPAT compliant (Ø3.5, Ø4.0 & Ø5.0)

BENEFITS

- Prevents tampering by cable cutting and reusing of seal
- Suitable for securing valuables for long periods of time
- Used to secure import/export goods worldwide

SPECIFICATIONS

Product Name	Size	Strength	Code
AluLock V2 D1.5 300	- Ø1.5x300mmL	>200kg-f/441lbs	AU15AC
AluLock V2 D2.0 300	- Ø2.0x300mmL	>350kg-f/771lbs	AU20AC
AluLock V2 D2.5 300	- Ø2.5x300mmL	>450kg-f/992lbs	AU25AC
AluLock V2 D3.5 300	- Ø3.5x300mmL	>1000kg-f/2205lbs	AU35AC
AluLock V2 D4.0 300	- Ø4.0x300mmL	>1100kg-f/2425lbs	AU40AC
AluLock V2 D5.0 300	- Ø5.0x300mmL	>1250kg-f/2755lbs	AU50AC

* Customized cable lengths available

Material

- Aluminium housing, non-preformed galvanized steel aircraft cable

Print

- Laser for anodized colours with logo & serial number
- Inkjet for powder coated with text & serial number

Colour

- Standard colours (Anodized) : Red, Blue, Bronze & Black
- Special colours (Anodized) : Green & Silver
- Special colours (Powder Coated) : Yellow, White


Packaging

- AluLock V2 D1.5 - 500pcs/inner carton, 2000pcs/outer carton
- AluLock V2 D2.0 - 250pcs/inner carton, 1000pcs/outer carton
- AluLock V2 D2.5 - 250pcs/inner carton, 1000pcs/outer carton
- AluLock V2 D3.5 - 250pcs/inner carton, 500pcs/outer carton
- AluLock V2 D4.0 - 100pcs/inner carton, 400pcs/outer carton
- AluLock V2 D5.0 - 150pcs/inner carton, 300pcs/outer carton

ISO17712:2010



DIMENSIONS

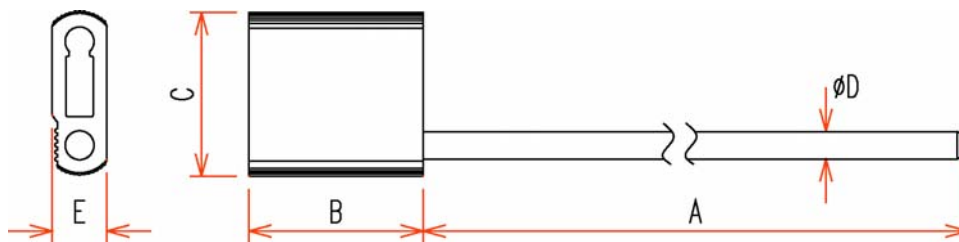

Type	A mm [inch]	B mm [inch]	C mm [inch]	D mm [inch]	E mm [inch]
AluLock V2 D1.5 300	300 [11.81"]	26 [1.02"]	22 [0.87"]	1.5 [0.06"]	6 [0.24"]
AluLock V2 D2.0 300	300 [11.81"]	26 [1.02"]	22 [0.87"]	2.0 [0.08"]	7 [0.28"]
AluLock V2 D2.5 300	300 [11.81"]	26 [1.02"]	22 [0.87"]	2.5 [0.10"]	7 [0.28"]
AluLock V2 D3.5 300	300 [11.81"]	32 [1.26"]	22 [0.87"]	3.5 [0.14"]	8.5 [0.34"]
AluLock V2 D4.0 300	300 [11.81"]	38 [1.50"]	22 [0.87"]	3.5 [0.14"]	8.5 [0.34"]
AluLock V2 D5.0 300	300 [11.81"]	32 [1.26"]	30 [1.18"]	5.0 [0.19"]	10 [0.39"]



Aluminium Body


Corrosive resistant body

Non-preformed Cable

Unravels when cut, thereby preventing rejoining

Various Cable Diameters

Available with cable ϕ 1.5mm, ϕ 2.0mm, ϕ 2.5mm, ϕ 3.5mm, ϕ 4.0mm & ϕ 5.0mm

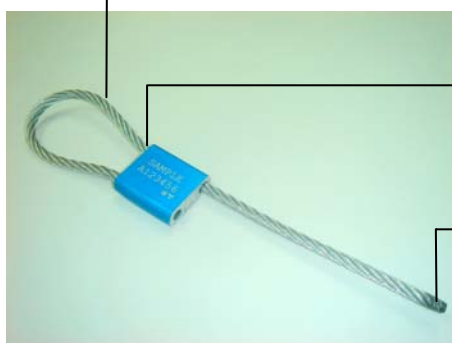

One-way Locking

Easy application of seal with one end of the cable permanently secured

Annealed Cable Tip

Easy insertion into aluminium housing

ABRIC, your Global Supplier of Security Sealing Solutions.

For further information, please visit our website for nearest contact:

www.abric.com

Sealing Assets Globally with quality and integrity