


# AluLock



## Dimensions

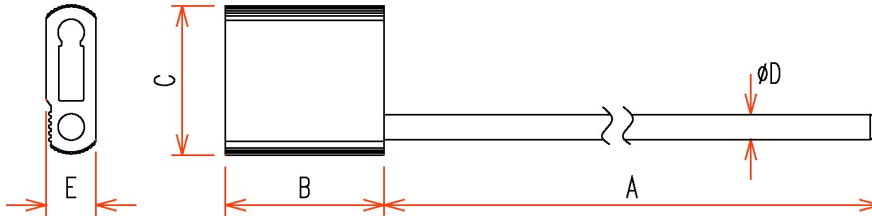

Type	A mm [inch]	B mm [inch]	C mm [inch]	D mm [inch]	E mm [inch]
AluLock V2 D1.5 300	300 [11.81"]	26 [1.02"]	22 [0.87"]	1.5 [0.06"]	6 [0.24"]
AluLock V2 D2.0 300	300 [11.81"]	26 [1.02"]	22 [0.87"]	2.0 [0.08"]	7 [0.28"]
AluLock V2 D2.5 300	300 [11.81"]	26 [1.02"]	22 [0.87"]	2.5 [0.10"]	7 [0.28"]
AluLock V2 D3.5 300	300 [11.81"]	32 [1.26"]	22 [0.87"]	3.5 [0.14"]	8.5 [0.34"]
AluLock V2 D4.0 300	300 [11.81"]	38 [1.50"]	22 [0.87"]	3.5 [0.14"]	8.5 [0.34"]
AluLock V2 D5.0 300	300 [11.81"]	32 [1.26"]	30 [1.18"]	5.0 [0.19"]	10 [0.39"]

## Specifications


Material : Body - Aluminium

Cable - Non-preformed galvanized steel aircraft cable


## Packaging

Product	Inner Carton						Outer Carton					
	QTY	L mm [inch]	W mm [inch]	H mm [inch]	Volume m <sup>3</sup> [ft <sup>3</sup> ]	Weight kg [lb]	QTY	L mm [inch]	W mm [inch]	H mm [inch]	Volume m <sup>3</sup> [ft <sup>3</sup> ]	Weight kg [lb]
AluLock V2 D1.5 300	500	400 [15.8]	185 [7.3]	200 [7.9]	0.0148 [0.523]	5.80 [12.79]	2000	420 [16.5]	400 [15.8]	440 [17.3]	0.0739 [2.610]	24.40 [53.79]
AluLock V2 D2.0 300	250	400 [15.8]	185 [7.3]	200 [7.9]	0.0148 [0.523]	4.30 [9.48]	1000	420 [16.5]	400 [15.8]	440 [17.3]	0.0739 [2.610]	18.30 [40.35]
AluLock V2 D2.5 300	250	400 [15.8]	185 [7.3]	200 [7.9]	0.0148 [0.523]	4.60 [10.14]	1000	420 [16.5]	400 [15.8]	440 [17.3]	0.0739 [2.610]	19.60 [43.21]
AluLock V2 D3.5 300	250	400 [15.8]	185 [7.3]	200 [7.9]	0.0148 [0.523]	7.20 [15.87]	500	420 [16.5]	400 [15.8]	220 [8.7]	0.0370 [1.307]	15.40 [33.95]
AluLock V2 D4.0 300	100	400 [15.8]	185 [7.3]	200 [7.9]	0.0148 [0.523]	6.70 [14.74]	400	420 [16.5]	400 [15.8]	440 [17.3]	0.0739 [2.610]	28.20 [62.04]
AluLock V2 D5.0 300	150	400 [15.8]	185 [7.3]	200 [7.9]	0.0148 [0.523]	8.80 [19.40]	300	420 [16.5]	400 [15.8]	220 [8.7]	0.0370 [1.307]	18.40 [40.57]


## Applications




1. Loop the cable through the item to be sealed



2. Insert and pull the cable through the locking chamber



3. Pull the cable all the way through the body until item is tightly sealed, then pull at body to ensure seal is locked



4. Remove seal with the appropriate cable cutters (eyes protection is recommended)