


JawLock



Dimensions

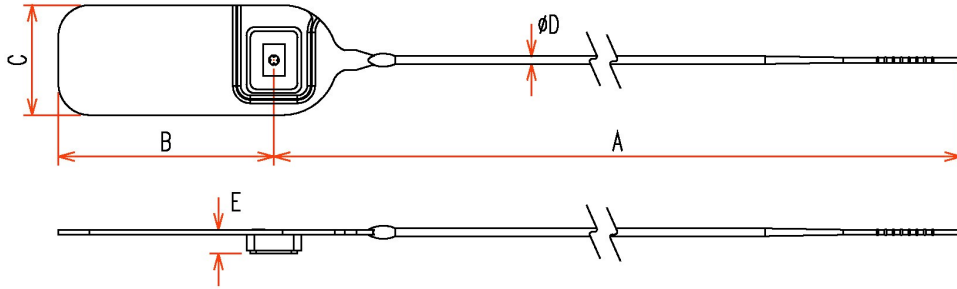

Type	A mm [inch]	B mm [inch]	C mm [inch]	D mm [inch]	E mm [inch]
JawLock 250	250 [9.84"]	55 [2.17"]	28 [1.10"]	2 [0.09"]	6 [0.24"]

Specifications


Material : Seal Body - Polypropylene, Tensile Strength : Min. 14kg-f / 30.9lb-f
 Locking Jaw - Metal

Temperature : -20 to 60°C / -4 to 140°F


Packaging

Product	Inner Carton						Outer Carton					
	QTY	L mm [inch]	W mm [inch]	H mm [inch]	Volume m ³ [ft ³]	Weight kg [lb]	QTY	L mm [inch]	W mm [inch]	H mm [inch]	Volume m ³ [ft ³]	Weight kg [lb]
JawLock 250	1000	370 [14.6]	360 [14.2]	230 [9.1]	0.0306 [1.081]	4.81 [10.61]	5000	1160 [45.7]	385 [15.2]	395 [15.6]	0.1764 [6.230]	25.96 [57.23]


Applications

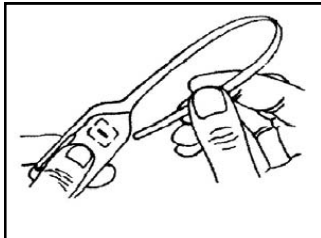

1. Insert strap into locking chamber

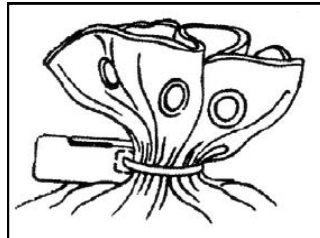

2. Pull tight around object being sealed

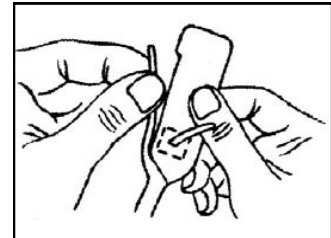

3. Use manual tear off or cutting tool to remove